

BT899

PROJECTOR CEILING MOUNT WITH MICRO-ADJUSTMENT

The **BT899** is a universal projector ceiling mount which can be used to mount projectors up to 25kg. Compatible with B-Tech's System 2 professional range, this mount can either be mounted flush to the ceiling or onto Ø50mm poles. Supplied pre-assembled for a simple three step installation, the BT899 is designed with easy adjustment of tilt, roll and swivel with optional micro-adjustment for short throw projectors making this mount the ideal solution for installing projectors.

SPECIFICATIONS

Max load	25kg
Tilt (pitch)	+/- 13°
Roll	+/- 6°
Yaw	360°
Ceiling drop	122mm
Max distance between fixings	370mm
Colour options	Black or White




FEATURES


- 1** Unique 'carousel' mounting plate for universal compatibility
 - 2** Features easy tilt, roll and swivel functions
 - 3** Compatible with B-Tech System 2 poles and ceiling mounts
 - 4** Optional micro-adjustment feature for short throw projectors
- Can be mounted directly to the ceiling or onto a pole
 - Compatible with Ø50mm (2") pole systems including B-Tech System 2 and 1.5" NPT pipe systems
 - Pre-assembled for simple three step installation
 - Integrated cable management for a smart installation
 - Security locking screws and Allen key provided for a secure installation
 - Suitable for projectors using M2.5, M3, M4, M5 and M6 fixings
 - All mounting hardware included




MAX LOAD	MICRO ADJUSTMENT	TILT	YAW	ROLL	COLOUR OPTIONS	
 25kg		 13° 13°	 360° POLE MOUNTED	 -6° +6°		



BT899

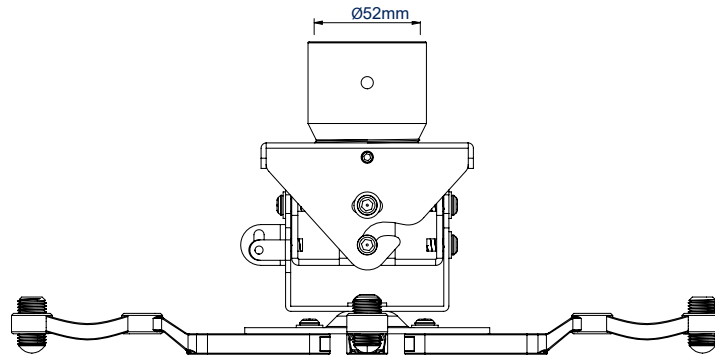

SIDE VIEW

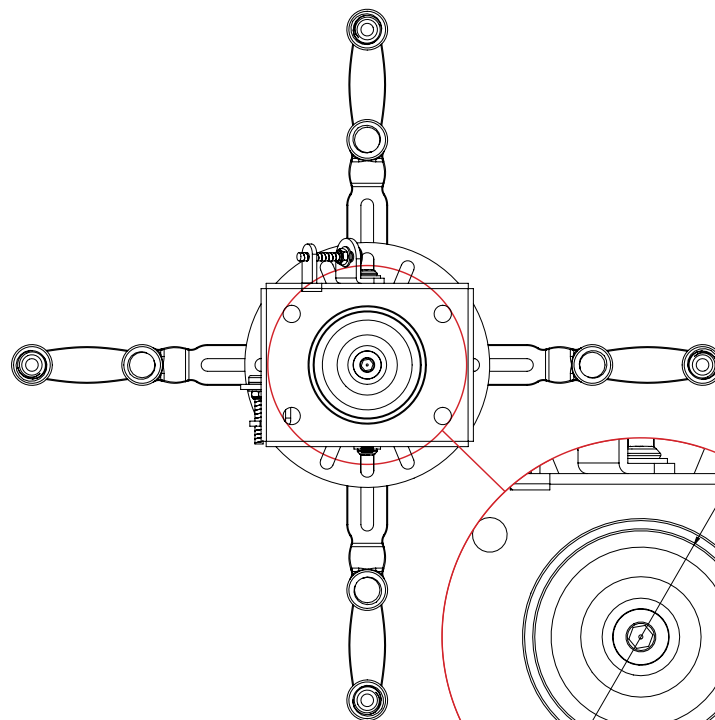

TOP VIEW

CEILING PLATE

ORDERING INFORMATION

COLOUR	ORDER REF	EAN
Black	BT899/B	5019318088902
White	BT899/W	5019318088926

RELATED PRODUCTS

PRODUCT CODE	NAME	DESCRIPTION
BT7850	Ø50mm Poles	Available in Black, White or Chrome and a variety of lengths
BT7822	Ceiling Mount	Securely fixes Ø50mm poles to the ceiling
BT893	Heavy Duty Projector Ceiling Mount w/ Micro-adjustment	Ideal for high ceilings where long drops are required
BT899XL	Extar Large Heavy Duty Projector Mount	Maximum distance between fixings 493mm