



Input Cover

For Samsung 32" E-Paper EMDX Display

Installation Guide

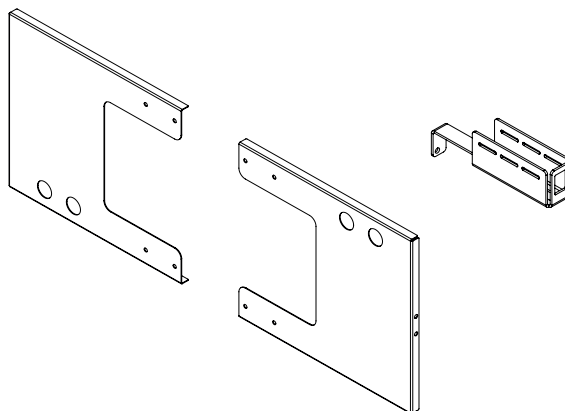

- Prevents access to inputs and buttons on the rear of a Samsung EM32DX E-Paper display
- Use in conjunction with B-Tech mounts:
BT7611-SAM32 Wall Mount or BT7613-SAM32 Floor Stand
- Includes power bank cradle
- Attaches to VESA fixings on rear of screen
- Suitable for both landscape and portrait installations
- Cover dimensions:
W. max. 718mm (28.25") **H.** 240mm (9.43") **D.** 11.5mm (0.45")

Contents	Pg	BT7611-ICW
Installation Safety Notes	2	
Parts List	4	
Installation Instructions	5	
Product Dimensions	10	
B-Tech Contact Details	12	

Installation Safety Instructions



Caution: This mount is intended for use only with the maximum weights indicated. Use with equipment heavier than the maximum indicated may result in instability causing possible injury.

Do not attempt to install this product until all instructions and warnings have been read and properly understood. *Please keep these instructions for future reference.*

Please check carefully to make sure there are no missing or defective parts - defective parts must never be used. B-Tech AV Mounts, its distributors and dealers are not liable or responsible for damage or injury caused by improper installation, improper use or failure to observe these safety instructions. In such cases, all guarantees will expire.

General

B-Tech AV Mounts recommends that a professional AV installer or other suitably qualified person install this product. Great care must always be taken during installation as most AV equipment is of a fragile nature, possibly heavy and easily damaged if dropped. If you do not fully understand the instructions or are not sure how to install this product safely, then please consult a professional for advice and/or to install this product for you. Failure to mount this product correctly may cause serious injury or death both during installation and at any time thereafter. Do not mount any AV equipment that exceeds the specific weight limit of the product you are installing. This weight limit will be clearly stated on each product and its packaging and will vary from product to product.

Product location

Please pay careful attention to where this product is located, some locations are not suitable for installation. For indoor use only. Install stand on level ground. When verifying the stability of the structure, consider the following external factors: The strength of the floor, exposure to sudden and severe wind and danger arising from contact with people and / or objects (e.g. installations in passageways, emergency exits), if located in a public or frequently populated area ensure that the product is out of the immediate reach of people.

Fixing hardware

It is highly recommended that all fixing screws be used where supplied and that the purpose of all other fixing hardware is fully understood. In some cases more AV equipment fixing hardware will be supplied to accommodate different models of equipment and set up configurations. The installer must be satisfied that any supplied fixing hardware is suitable for each specific installation. The fixing kit supplied with the product may not be suitable for all walls. If any fixing screws or included hardware are deemed not sufficient for a safe installation then please consult a professional or your local hardware store.

Hazard limitation


When routing cables take advantage of any built in cable management features that the product might provide and ensure that all cables are tidy and secure. Check to see that any moving aspect of the product can do so unhindered by any cabling. Some products have moving parts and the potential to cause injury through the crushing or trapping of fingers or other body parts. Particular attention to the nature of moving parts is required especially when assembling installing and adjusting during set up. Immediately after installation double-check that the work done is safe and secure. Double-check all necessary fixings are present and are of ample tightness. It is recommended that periodic inspections of the product and its fixing points are made as frequently as possible (no more than 6 months apart) to ensure that safety is maintained. If in doubt consult a professional AV installer or other suitably qualified person.

- CN B-Tech AV Mounts 建议本产品由专业AV安装人员或其他合格人员安装。B-Tech AV Mounts 及它的代理商、经销商不对由于不恰当的安装而造成的损失或伤害负责。本产品必须安装在合适的架构上，并仅用于不超过所标示的最大承重。
- CS Spoločnosť B-Tech AV Mounts doporučuje previesť instaláciu tohto produktu inštalátora AV či inak spôsobilé osoby. Spoločnosť B-Tech AV Mounts, jej distribútori a predajci nenesú zodpovednosť za škodu alebo zranenie spôsobené nevhodnou instaláciou. Tento výrobok je nutné umiestiť do vhodnej konštrukcie a používať len po uvedenej maximálnej výške.
- DE B-Tech AV Mounts empfiehlt, dass dieses Produkt durch einen qualifizierten AV-Techniker oder eine andere Person mit geeigneter Qualifikation installiert wird. B-Tech AV Mounts, ihre Distributoren und Händler können nicht für durch fehlerhafte Montage verursachte Beschädigung oder Verletzung haftbar bzw. verantwortlich gemacht werden. Dieses Produkt muss auf einem geeigneten Untergrund montiert werden und darf nur bis zum angegebenen Höchstgewicht verwendet werden.
- EN B-Tech AV Mounts recommends that this product be installed by a qualified AV technician or other suitably qualified person. B-Tech AV Mounts, its distributors and dealers are not liable or responsible for damage or injury caused by improper installation, improper use or failure to observe these safety instructions. In such cases, all guarantees will expire. This product must be mounted on a suitable surface and may only be used up to the specified maximum weight.
- ES B-Tech AV Mounts recomienda que un instalador de audio y video profesional u otra persona debidamente cualificada instale este producto. B-Tech AV Mounts, sus distribuidores y concesionarios no se hacen cargo ni se responsabilizan de ningún daño o lesión provocados por una instalación inapropiada. Este producto se debe montar en una estructura adecuada y se debe utilizar soportando solamente hasta el peso máximo indicado.
- FR B-Tech AV Mounts recommande de confier l'installation de ce produit à un installateur AV professionnel ou à une autre personne dûment qualifiée. B-Tech AV Mounts, ses distributeurs et ses revendeurs ne sauraient être tenus responsables de tout dégât ou de toute blessure résultant d'une installation incorrecte. Ce produit doit être monté sur un support approprié et utilisé dans la limite du poids maximum indiqué.
- IT B-Tech AV Mounts consiglia di affidare l'installazione di questo prodotto a un installatore specializzato o ad altra persona adeguatamente qualificata. B-Tech AV Mounts, i suoi distributori e rivenditori non accettano alcuna responsabilità nei riguardi di eventuali danni o infortuni causati da un'errata installazione. Questo prodotto deve essere fissato a una struttura idonea e utilizzato unicamente sino al peso massimo indicato.
- JP B-Tech AV Mounts はAV設置の専門家または適合した知識を備えた人が製品を設置することを推奨します。B-Tech AV Mountsと販売店、取引先はこうした安全指針に従わない場合に随伴される製品の損傷や傷害に対する責任を負いません。場合によって製品が設置されるに適していないところもあるので設置位置に特別な注意を傾けてください。この製品の位置に注意を傾けて設置に適していない壁があるかを確認してください。指定した重量制限を超過するAV装備を装着しないでください。
- KR B-Tech AV Mounts 는 AV 설치 전문가 또는 적합한 지식을 갖춘 사람이 제품을 설치하도록 권장합니다. B-Tech AV Mounts 와 판매점, 거래처는 이러한 안전 지침을 따르지 않을 경우에 수반될 제품의 손상이나 상해에 대한 책임을 지지 않습니다. 경우에 따라 제품이 설치되기에 적합하지 않은 곳들도 있으므로 설치 위치에 특별한 주의를 기울여 주시기 바랍니다. 제품의 설치 위치에 주의를 기울여 확인하십시오. 지정된 무게 제한을 초과하는 AV 장비를 장착하지 마십시오.
- NL B-Tech AV Mounts adviseert om dit product te laten installeren door een professionele AV-installateur of andere hiervoor gekwalificeerde persoon. B-Tech AV Mounts, haar distributeurs en dealers zijn niet aansprakelijk of verantwoordelijk voor schade of letsel die is veroorzaakt door onoordeelkundige installatie. Dit product moet worden gemonteerd aan een geschikte constructie, waarbij het aangegeven maximum gewicht niet mag worden overschreden.
- PL Firma B-Tech AV Mounts zaleca, aby ten produkt był instalowany przez profesjonalnych instalatorów AV lub inny odpowiednio przeszkolony personel. Firma B-Tech AV Mounts, jej dystrybutorzy i dealerzy nie ponoszą odpowiedzialności za uszkodzenia lub obrażenia lub obrażenia lub powstaje w wyniku nieprawidłowej instalacji. Niniejszy produkt musi być amontowany na odpowiedniej powierzchni, a podczas użytkowania nie wolno przekraczać podanego maksymalnego obciążenia.
- PT A B-Tech AV Mounts recomenda que a instalação deste produto seja efectuada por um instalador de AV instalador de AV profissional ou outra pessoa devidamente habilitada. A B-Tech AV Mounts e os seus distribuidores e concessionários não são responsáveis por danos ou lesões causados por uma instalação incorrecta. Este produto tem de ser montado numa estrutura adequada e utilizado somente até ao peso máximo indicado.
- RU Компания B-Tech AV Mounts рекомендует, чтобы установка данного изделия производилась инженером по установке аудио-видеотехники или другим специалистом с соответствующей квалификацией. Компания B-Tech AV Mounts ее дистрибьюторы и дилеры не несут ответственности за повреждения или травмы, полученные в результате неправильной установки.

توصي بي-تيك للتجارة الدولية المحدودة بأن شخص محترف في تركيب ال AV أو شخص مؤهل تأهيلا مناسباً لتركيب هذا المنتج، بي-تيك للتجارة الدولية، موزعها والتجار ليست عرضة أو مسؤولة عن الأضرار أو الإصابات الناجمة عن تركيب غير سليم، والاستخدام غير السليم أو عدم مراعاة هذه التعليمات للسلامة. يجب أن يتم تركيب هذا المنتج في بنية مناسبة ويجب استخدام فقط لدعم الحد الأقصى للوزن المشار إليه.

BT7611-ICW Parts List

Please keep this for future reference

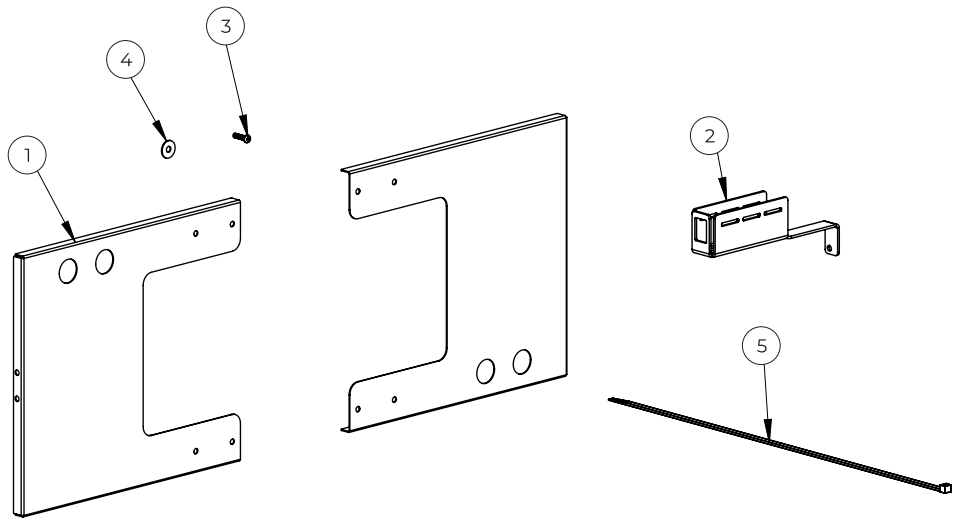


Installation Tools Required

Screwdriver


Item	Description	Qty
1	Port and Battery cover	2
2	Power Bank Cradle	1
3	M4 x 15mm Screw	5
4	M5 Metal Washer	1
5	Cable Tie L.400mm x W.5mm	2

Use with Samsung 32" E-Paper screens. Recommended configurations shown below.

BT7611-SAM32
Wall Mount with Tilt

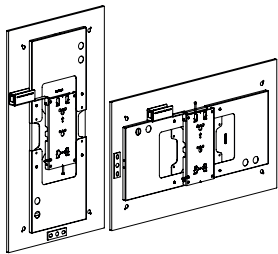

BT7613-SAM32
Back-To-Back Stand with Tilt

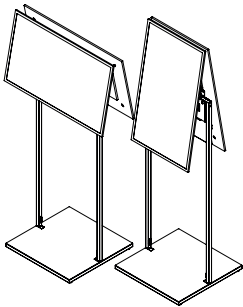



Suitable for both landscape and portrait orientation

Installation Instructions

1A. A. Installation method for use with BT7611-SAM32


Attach M4 captive screw to the BT7611 wall plate.

Note: See **Step 4** so this does not conflict placement of *item 2*.

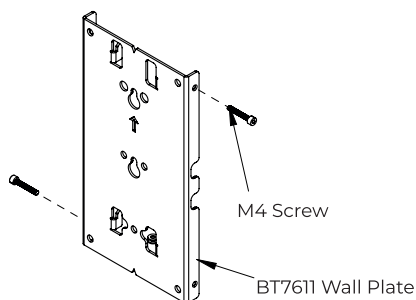


2A. Assemble Covers

Using the VESA fixings, attach *item 1* and the BT7611 Screen Interface Plate to the rear of display with *item 3*.

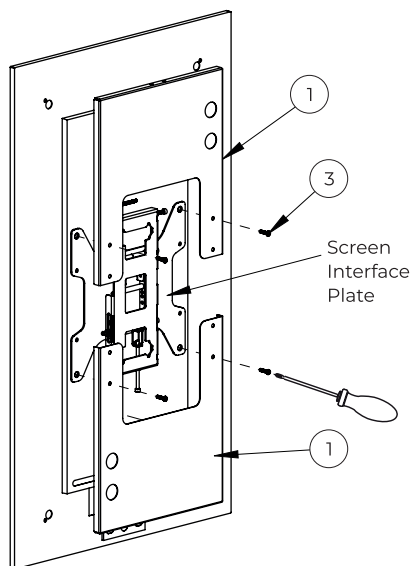


Note: Do not attach wall plate to BT7611 until **Step 4**.

Note: Decide if only ports or ports and buttons can be accessed. Refer to the screens specific instruction manual for orientation.

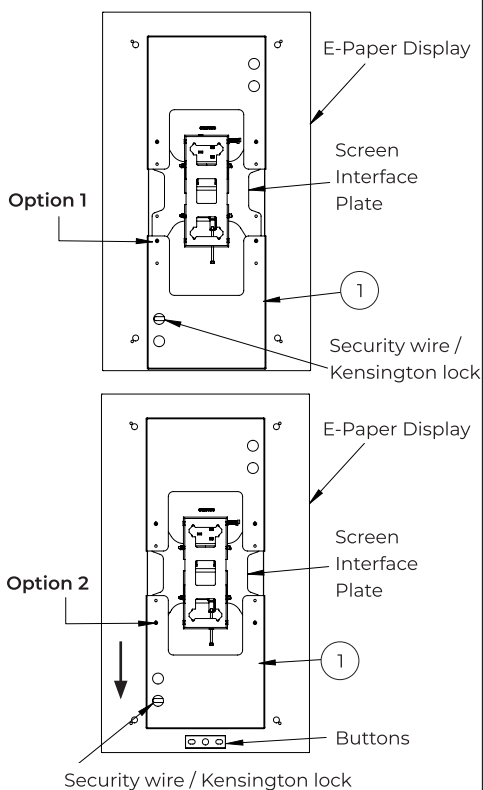



3A. Install Power Bank

- i. Fix the BT7611 wall plate to the wall.

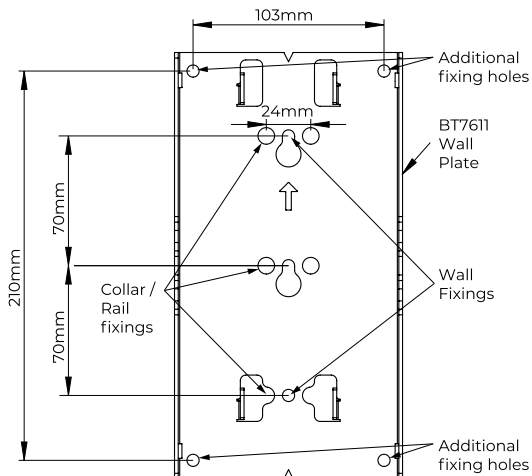

- ii. Attach *item 2* to the side of the BT7611 wall plate using *item 3*.
- iii. Orientate power bank to have cable outlets pointing down, through cut-outs on *item 2*.
- iv. Plug in cables, leaving screen side cable ends hanging.



Optional: Use cable ties (*item 5*) to secure the power bank to the power bank cradle (*item 2*).

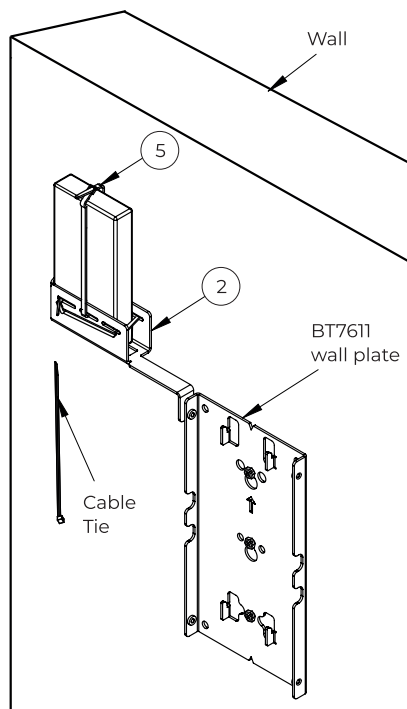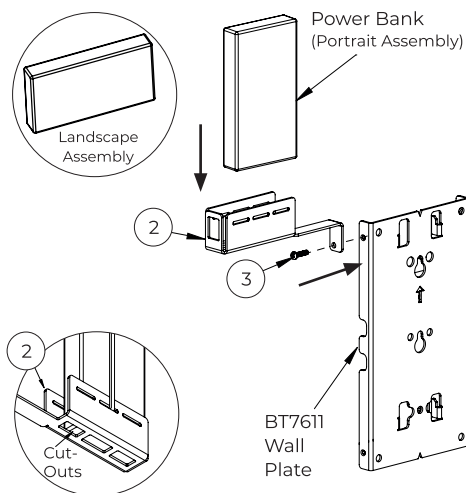



4A. Mount Screen To Wall Bracket

- i. Hook screen onto wall plate.
- ii. If necessary, adjust the display tilt using the adjuster screw on the BT7611.

Landscape display
Installation shown

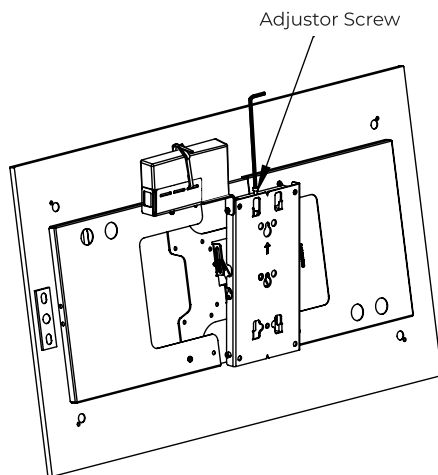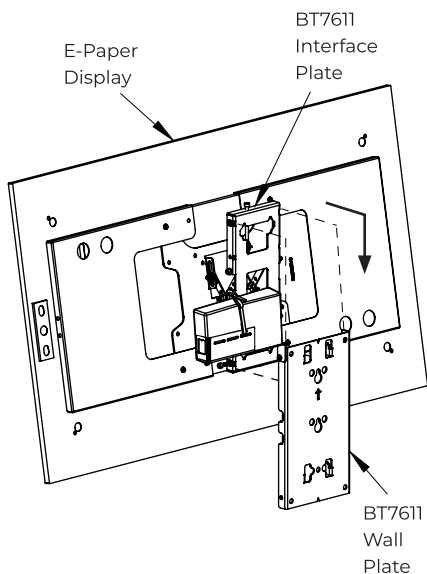



- iii. Secure display by tightening the M4 x 30mm locking screw on the BT7611.

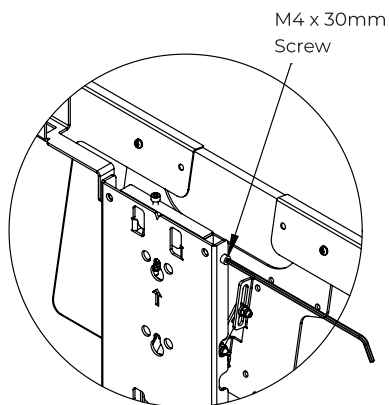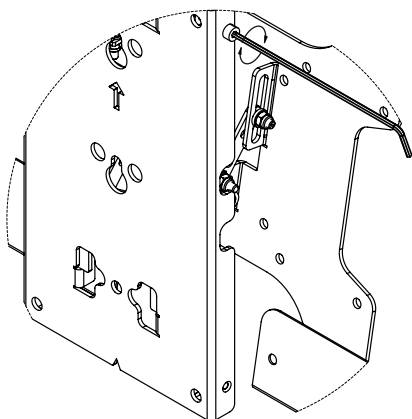

1B. B. Installation method for use with BT7613-SAM32

Assemble Covers

- i. Follow **Steps 1-6** of the BT7613 instruction manual.
- ii. Place screen on a flat, clean surface to avoid damage and on the back, attach *item 1* and the BT7613 VESA plate to the rear of screen using *item 3*.

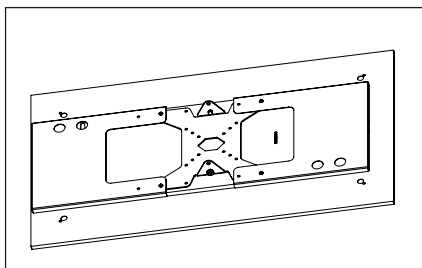
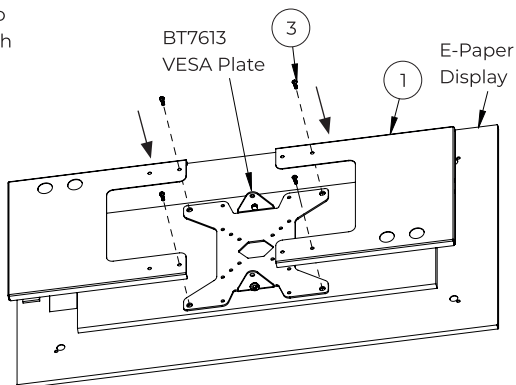


2B. Install Power Bank

Note: Ensure any AV equipment or cabling is prepared correctly in the storage compartment before proceeding.



- i. Screw *item 2* into top of the closed storage compartment of the BT7613 and fit the power bank into the cradle

Note: Number of power bank cradles dependent on the type of installation.

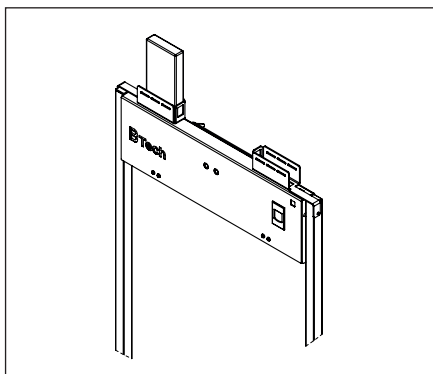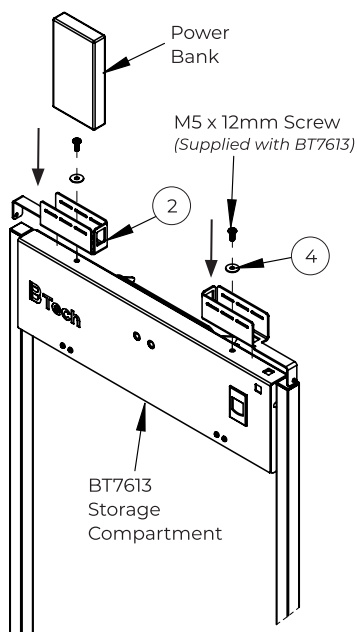

ii. Optional: Use cable ties (item 5) to secure power bank to cradle (item 2).


Note: Ensure ports to the power bank are not blocked.

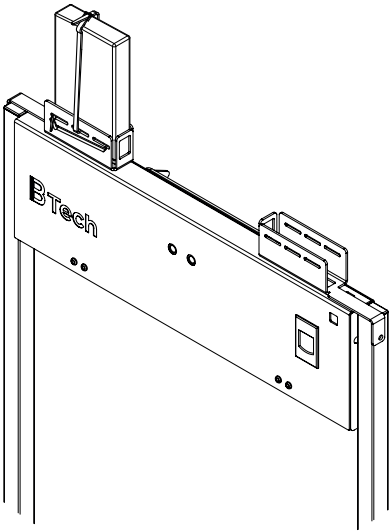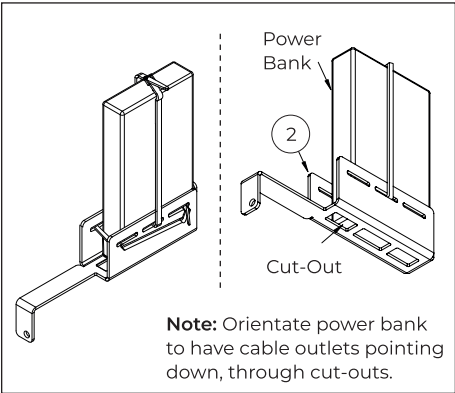


3B. Mount Display Onto Stand

Hook the screen onto the stand using the BT7613 VESA plate and secure display.
Repeat for 2nd screen.

Important: To avoid any possible damage to the display. Keep hold of screen when securing tilt.

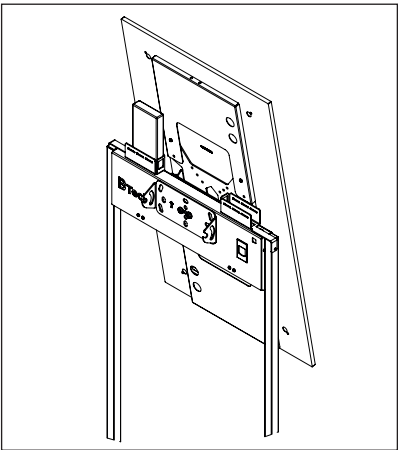


Portrait display
Installation shown

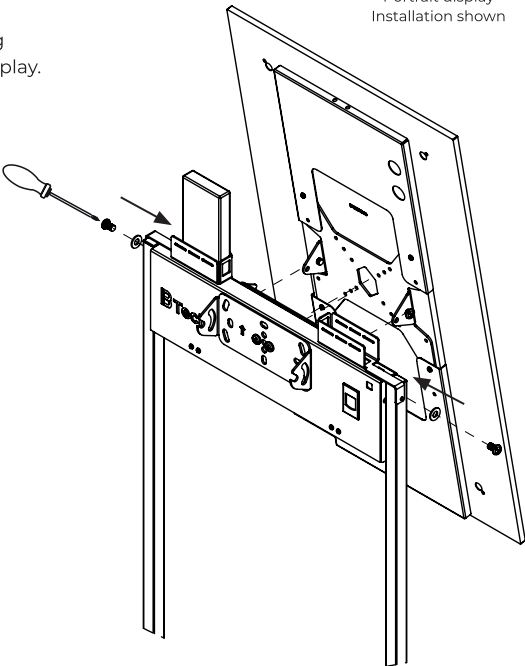


BT7611-ICW Dimensions

Please keep this for future reference

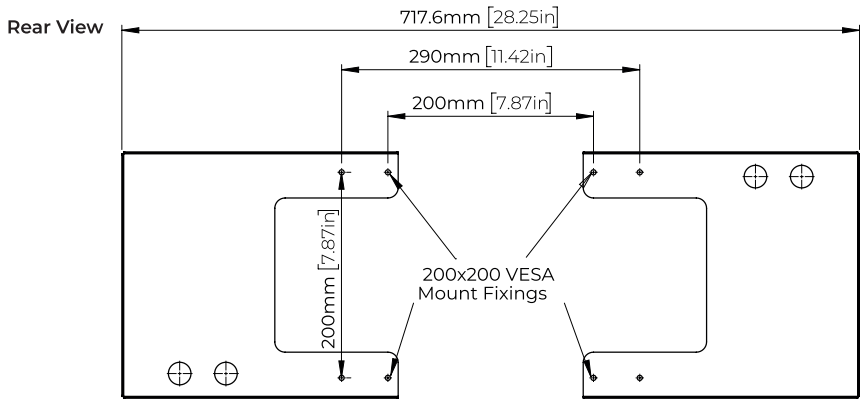


POSITION A - Covering of Battery Compartment Ports and Buttons

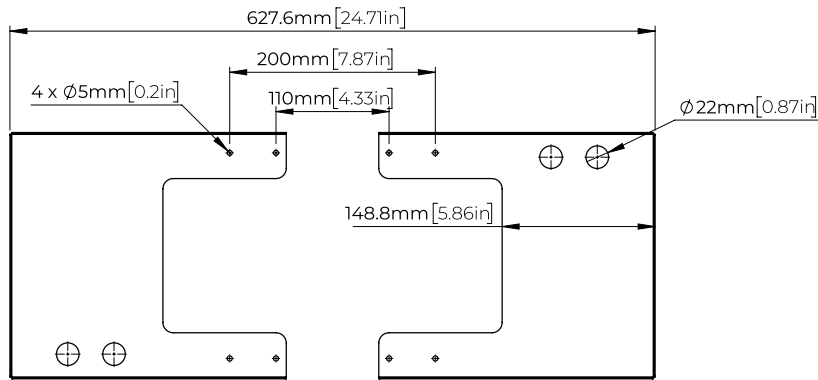


POSITION B - Covering of Battery Compartment and Ports

Top View







Side View



Power Bank Cradle

Maximum recommended
power bank size:
150 x 150 x 23mm
[5.90 x 5.90 x 0.90in]

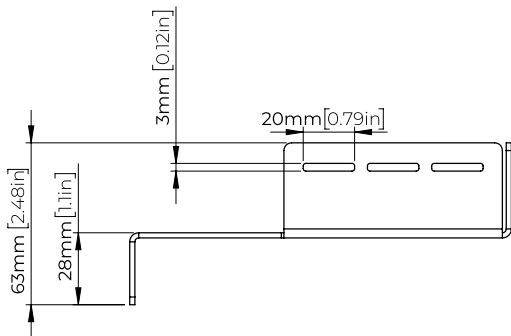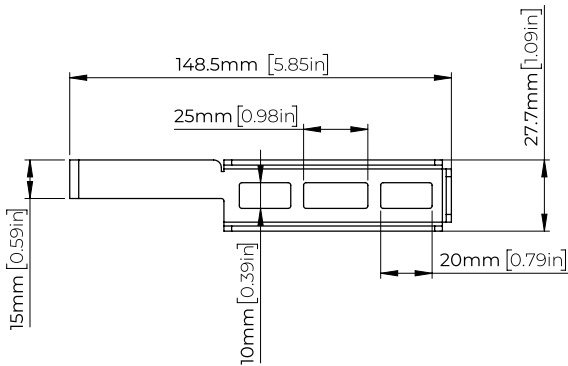

These instructions are intended as a guide only and B-Tech accepts no liability for the accuracy of the information contained in this document.

Contact: info@btechavmounts.com

©2025 B-Tech AV Mounts Corporation Ltd. All rights reserved.

B-Tech AV Mounts is a division of B-Tech AV Mounts Corporation Ltd.

B-Tech AV Mounts and the B-Tech logo are registered trademarks.

All B-Tech images and symbols are exclusive property of B-Tech AV Mounts Corporation Ltd.

All other brands and product names are trademarks of their respective owners.

Any reproduction, retransmission or republication of any part of this manual is strictly prohibited, unless prior written permission has been granted by B-Tech AV Mounts Corporation Ltd.

Photographs are for illustrative purposes only. E&OE

AMA-BT7611-ICW-V1-0925-129 Made in Vietnam

